Rockwood® Premier 9D Retaining Wall Block



Premier™ 9D represents a new generation of retaining walls based on extreme performance and superior efficiency. At 47 lbs., Premier 9D is the lightest weight retaining wall unit per sq. ft. in the industry and is one of the most cost effective systems available. Its seamless and linear appearance is an attractive solution for any type of challenging application, whether it's commercial, industrial or governmental.




www.rockwoodwalls.com

ROCKWOOD®
RETAINING WALLS
A better way.™

Rockwood® Premier 9D Retaining Wall Block



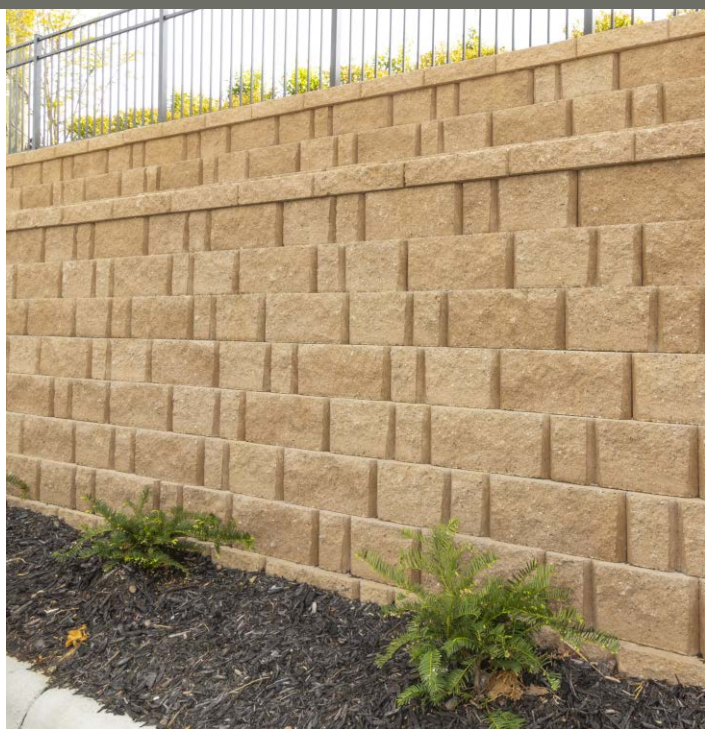

Pound for pound, Premier 9D is unlike any other SRW block.

Premier 9D's revolutionary block design makes it the most efficient 1.0 sq. ft. SRW block ever. At just 47 lbs., it beats all other block systems for freight efficiencies and ease of construction.

Features and Specifications


- Split-face, beveled sides
- Designed with Max-Core™ Technology for connection strength and resistance to shear from continuous stone columns
- Lightweight for ease of handling, reducing fatigue
- Increased freight efficiencies
- Can be built to amazing heights with proper engineering
- Straight-split face or Colonial face options

Dimensions:	18" W x 9" D x 8" H
Weight:	47 lbs. (21 kg)
Area:	1.0 sq. ft.
Setback:	1.0" (7°)

PREMIER WALL SERIES from Rockwood Retaining Walls

Manufactured in accordance with ASTM C1372. Unit availability, color and specifications vary by manufacturer. Contact your nearest Rockwood manufacturer or dealer for more information. Nominal dimensions shown.

Max-Core Technology features large, open cores that backfill quickly and easily to form "stone-columns", adding support and stability to the wall.

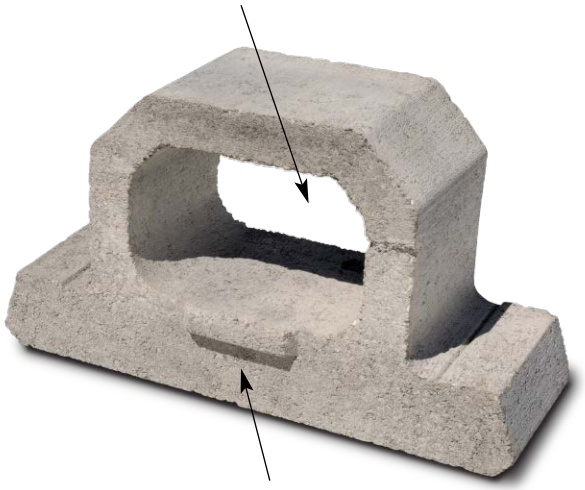

Bottom, rear anchor bar creates an automatic 7° setback.

ROCKWOOD® RETAINING WALLS
A better way.™

325 Alliance Place NE
Rochester, MN 55906

phone: **(507) 529-2871**
fax: **(507) 529-2879**
www.rockwoodwalls.com

Available at:

©2026 Rockwood Retaining Walls, Inc. All Rights Reserved. Made worldwide under license from Rockwood Retaining Walls, Inc. US and international patents issued and pending. This information has been prepared for the benefit of customers interested in Rockwood Retaining Wall products. It was reviewed carefully prior to publication. Rockwood assumes no liability for its accuracy or completeness. Final determination of the suitability of any information or material for the use contemplated, or for its manner of use, is the sole responsibility of the user. Rockwood Retaining Walls reserves the right to change product specifications at any time without incurring obligations. 626